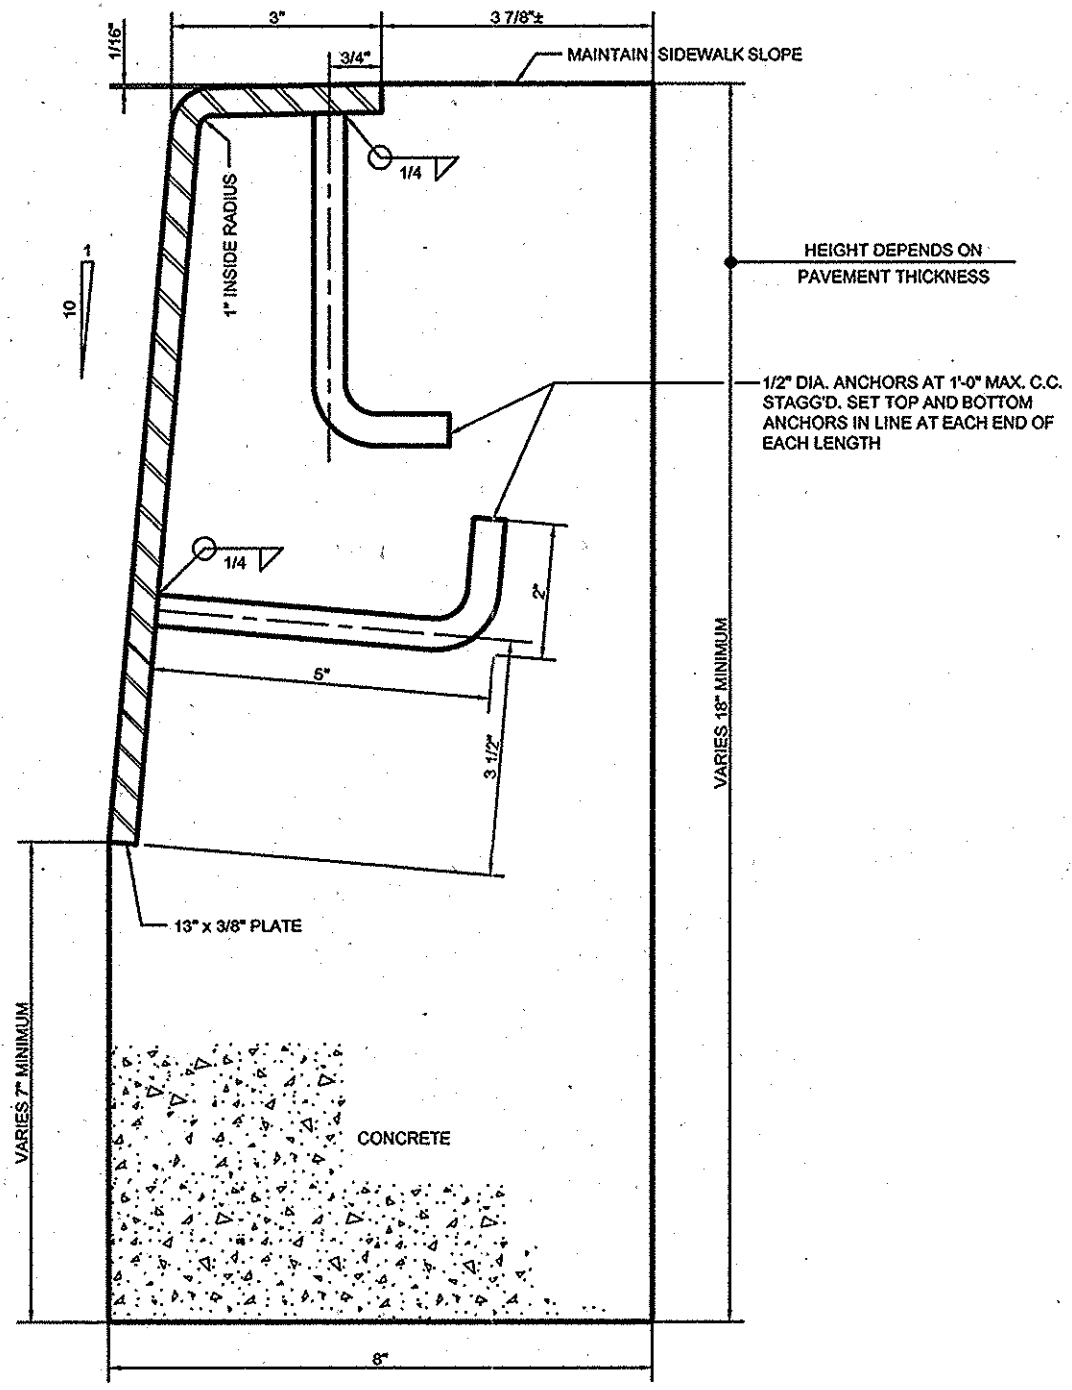
3"
3 7/8"±
1/16"
3/4"
MAINTAIN SIDEWALK SLOPE
1/4
1" INSIDE RADIUS
1
10
HEIGHT DEPENDS ON
PAVEMENT THICKNESS
1/2" DIA. ANCHORS AT 1'-0" MAX. C.C.
STAGG'D. SET TOP AND BOTTOM
ANCHORS IN LINE AT EACH END OF
EACH LENGTH
1/4
2"
5"
3 1/2"
VARIES 18" MINIMUM
13" x 3/8" PLATE
VARIES 7" MINIMUM
CONCRETE
8"

DETAIL

N.T.S.